# CRP2
# LITHIUM MANGANESE DIOXIDE




## Features & Benefits


- Operating temperature range between -40° C to +-70° C
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

## Specifications


| | |
|---|---|
| **Nominal Capacity:** | 1400 mAh |
| **Nominal Voltage:** | 6V |
| **Weight:** | Approximately 37g |
| **Operating Temperature:** | -40°C - +70°C* |

*Please consult Panasonic for use below and above -20°C to +60°C

## Dimensions

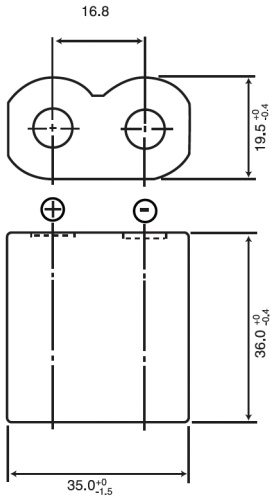


## Temperature Characteristics

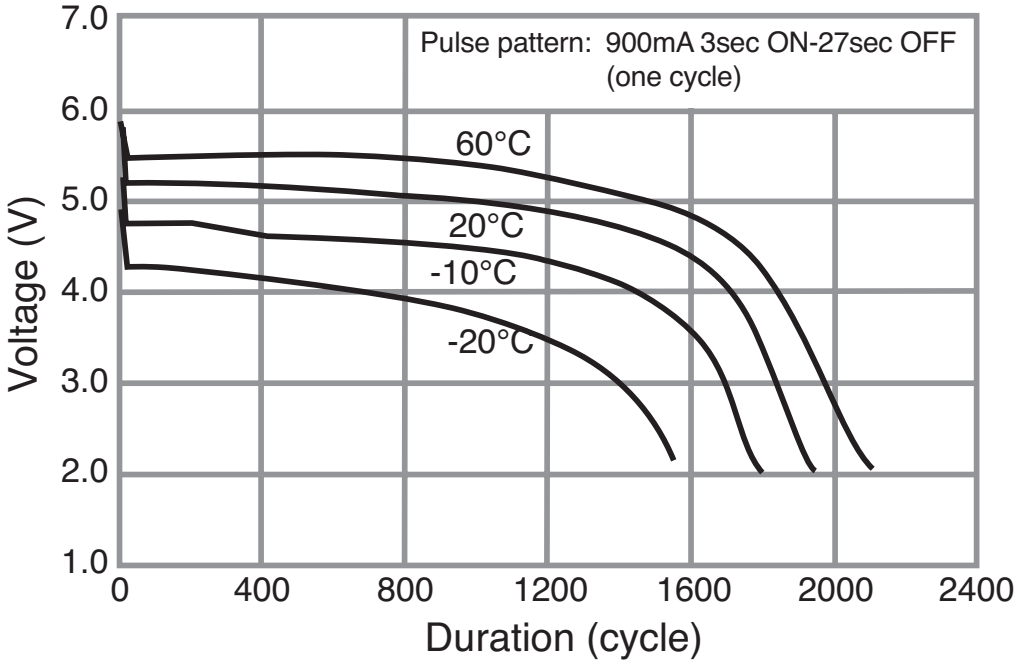


*Please consult Panasonic for use below and above -20°C to +60°C

LithiumManganeseDioxide/CRP2/Copyright@2015 Panasonic Corporation of America. All Rights Reserved.

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit **www.na.industrial.panasonic.com/products/batteries** or e-mail **oembatteries@us.panasonic.com**.

*The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.*